




## Monitor bianco e nero 9” con audio

Mod. HR09MA

### Precauzioni d'uso

- Assicurarsi dell'integrità dell'apparecchio dopo averlo tolto dall'imballo.
- Prima di effettuare qualsiasi operazione di pulizia o di manutenzione disinserire l'apparecchio dalla rete di alimentazione elettrica. Non usare prodotti spray per la pulizia dell'apparecchio.
- Evitare di appoggiare su di esso oggetti contenenti liquidi; non esporre in alcun modo il prodotto ad acqua e pioggia.
- Controllare che la temperatura d'esercizio sia nei limiti indicati e che l'ambiente non sia particolarmente umido. Provvedere un'ideale ventilazione.
- Si consiglia di scollegare il cavo di alimentazione qualora il monitor non dovesse essere utilizzato per parecchio tempo.
- In caso di guasto e/o cattivo funzionamento togliere alimentazione tramite l'interruttore generale.
- Il dispositivo deve essere aperto soltanto da personale tecnico qualificato.
- L'inosservanza comporterà l'immediata decadenza della garanzia
- Per le riparazioni rivolgersi solo ad un centro di assistenza tecnica autorizzato HR.

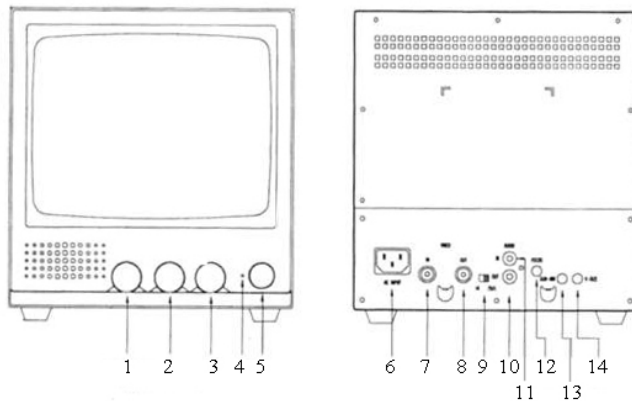

### Identificazione delle parti

1. Controllo volume
2. Controllo contrasto
3. Controllo luminosità
4. Indicatore luminoso accensione
5. Tasto accensione/spengimento
6. Presa di alimentazione 230 Vac
7. Ingresso video (BNC)
8. Uscita video (BNC)
9. Controllo impedenza HI-75 Ω
10. Uscita audio (RCA)
11. Ingresso audio (RCA)
12. Controllo messa a fuoco
13. Ulteriore regolazione luminosità
14. Ulteriore regolazione posiz. verticale immagine



### Caratteristiche tecniche

Risoluzione	oltre 800 linee al centro
Sistema	CCIR
Alimentazione	230 Vac
Consumo	20W
Ingressi video	1
Uscita video	1
Ingressi audio	1 (50 Ω)
Uscita audio	1 (50 Ω)
Temperatura d'uso	-10° / 50°
Umidità relativa	10% / 90%
Dimensioni	222x238x250
Peso	4,7 Kg



Specifiche tecniche soggette a variazioni senza preavviso

### Installazione

- Collegare il cavo di alimentazione alla presa di corrente 230V
- Se si utilizza un solo monitor, posizionare il controllo impedenza su 75 Ω. Se si utilizzano più monitor, i controlli impedenza andranno tutti posizionati su HIGH, tranne quello dell'ultimo della serie che andrà posizionato su 75 Ω
- Accendere il monitor
- Regolare dal pannello frontale il contrasto e la luminosità dell'immagine

**Garanzia: 24 mesi su prodotto  
integro, non manomesso**

### HR EUROPE s.r.l.

**ROMA:** sede legale e amministrativa; Via Giulianello, 1-7 - 00178 Roma, ITALIA - Tel +39 06 7612912 Fax +39 06 7612601

**TORINO:** sede operativa; Via G.B.Feroggio, 10 - 10151 Torino, ITALIA - Tel +39 011 453 53 23 Fax +39 011 453 70 49

**SHANGHAI:** ufficio di rappresentanza; Shanghai Mart 10th floor, room 10G04, 2299 Yanan Road West -

200336 Shanghai, CHINA - Tel. +86 021 62360668 Fax. +86 021 62361682 - e-mail: [infoshangai@hrcctv.com](mailto:infoshangai@hrcctv.com)

e-mail: [info@hrcctv.com](mailto:info@hrcctv.com) web: [www.hrcctv.com](http://www.hrcctv.com) - Codice Fiscale e Partita IVA 06397551000 - Iscrizione R.E.A. 966880




## Monitor B/W 9” with audio

Mod. HR09MA

### Important safeguards

- Unpack the monitor carefully and check for any damage.
- Before carrying out any type of cleaning or maintenance, unplug the monitor from the mains supply. Do not use spray products to clean the monitor.
- Do not rest objects containing liquids on the monitor.
- Check that operating temperature is in the range indicated and that the environment is not particularly damp. Provide suitable ventilation and never install the appliance in niches with a volume less than twice that of the appliance.
- It is good practice to unplug the power cord if the monitor is not to be used for long periods.
- In the case of faults or incorrect functioning, switch off the power supply using the main on/off switch.
- Non observance will involve the immediate forfeiture of the guarantee.
- For repairs, contact only an authorized HR technical assistance center.

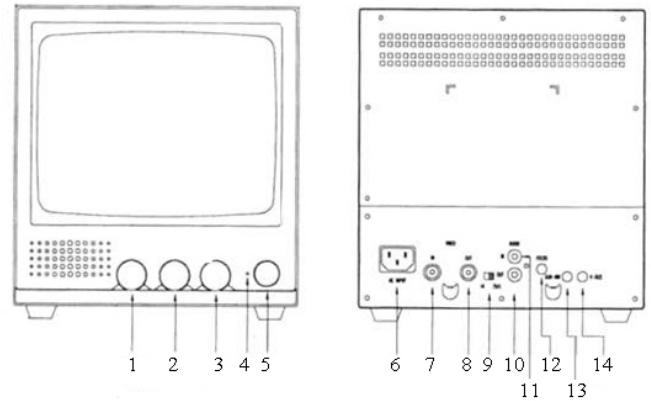

### Part names

1. Volume control
2. Contrast control
3. Brightness control
4. Power LED indicator
5. Power switch
6. Power socket
7. Video input (BNC)
8. Video output (BNC)
9. HI-75  $\Omega$  impedance switch
10. Audio output (RCA)
11. Audio input (RCA)
12. Focus control
13. Sub-adjustment of brightness
14. Sub-adjustment of vertical size



### Specifications

Resolution	more than 800 lines
System	CCIR
Power source	230 Vac
Power consumption	20W
Video input	1
Video output	1
Audio input	1 (50 $\Omega$ )
Audio output	1 (50 $\Omega$ )
Operating temperature	14°F / 122°F
Operating humidity	10% / 85%
Dimensions	222x238x250
Weight	4,7 Kg

Specifications liable to modification without notice



### Installation

- Connect power cable to 230V.
- When using only one monitor, turn the impedance terminal switch to 75  $\Omega$  position, when using more one monitor, all of HI/75  $\Omega$  monitor switches to HI position. But the last monitor switch should be at 75  $\Omega$  position of proper line termination.
- Switch on the monitor
- Regulate contrast and brightness using regulations on front panel.

**Guarantee:** 24 months on  
integral product, not tampered

### HR EUROPE s.r.l.

**ROMA:** legal and administrative office; 00178, ITALY, Rome, Via Giulianello, 1-7 – Tel +39 06 7612912 Fax +39 06 7612601

**TORINO:** operative office; 10151, ITALY, Turin, Via G.B.Feroggio, 10– Tel +39 011 453 53 23 Fax +39 011 453 70 49

**SHANGHAI:** representative office; Shanghai Mart 10th floor, room 10G04, 2299 Yanan Road West –

200336 Shanghai, CHINA – Tel. +86 021 62360668 Fax. +86 021 62361682 – e-mail: [infoshangai@hrcctv.com](mailto:infoshangai@hrcctv.com)

e-mail: [info@hrcctv.com](mailto:info@hrcctv.com) web: [www.hrcctv.com](http://www.hrcctv.com) – Codice Fiscale e Partita IVA 06397551000 – Iscrizione R.E.A. 966880